


SLT2

Total Station



The SLT2 has a fast and powerful reflectorless EDM (0.8 seconds) that is designed to provide advanced accuracy with an efficient workflow in a sleek body. In order to ensure long-term operation in adverse weather conditions, various environmental tests such as vibration, drop, temperature, and humidity were performed to achieve the highest quality.


Function

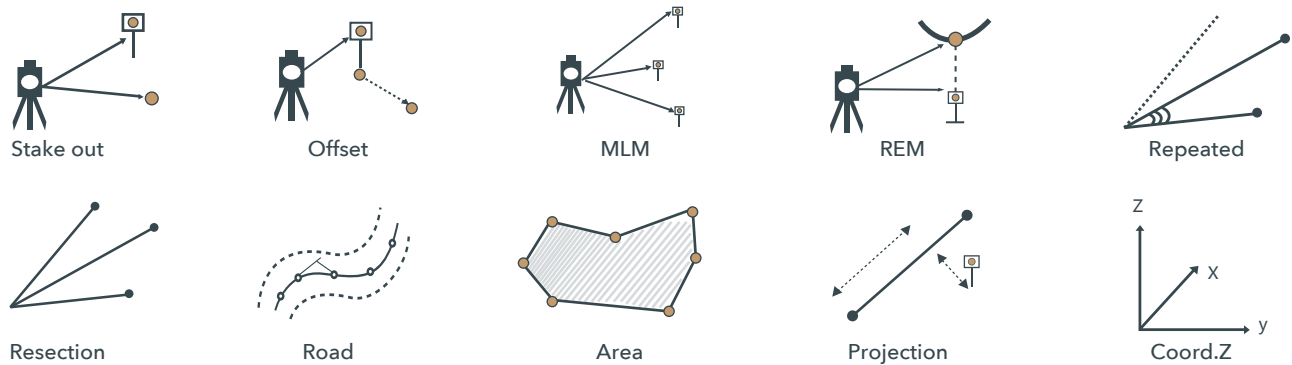

- Built-in multi-function calibration software, the maintenance convenience is greatly improved.
- The comprehensive fault diagnosis software can help you locate the fault exactly. The simple operation will guarantee you strong after-sales service.



Key Features



- Speed down to 0.3s.
- Reflectorless range 800m.



- 2.8-inch 240*320 pixel, clearly visible in sunlight.



- More efficient and accurate.



- Dual-axis tilt sensor.
- High-precision bead shafting.
- Sealed encoder disk.



- 3000mA high-capacity Li-ion battery.
- Battery life exceeds 18h.



- USB cable and U disk.
- Format:(*.csv),(*.txt),(*.dat),(*.dxf),(*.gt7),(*.htf) etc.




- Support SurvCE and Hi-Survey Road connection.
- Support secondary development.



Dust
Proof



Water
Proof



Dual LCD
Display



Onboard
Software



Easy-to-Use
Interface



Professional
Support Network

SLT 2 Total Station

Specifications

Angle Measurement(Hz、v)	
Angle measuring principle	Absolute Encoding
Minimum Readout	1" (0.3 mgon), 5" (1.5 mgon), 10" (3 mgon)
Accuracy	2"
Distance Measurement(IR) ¹	
Single Prism	3000m
Accuracy(Fine/Quick/Tracking)	2mm+2ppm
Measuring Time(Repeat/Tracking)	0.8s/0.3s
Reflectorless Range ² (The target is Kodak white board with reflect rate 90%)	800m
Accuracy (Change according to the different reflector condition)	3mm+2ppm
Measuring Time ³	Approx. 1s
Telescope	
Magnification	30x
Field of View	1°30' (2.7m at 100m)
Minimum Focusing Distance	1.5m
Reticle	Illuminated
Effective Diameter of Objective	45mm/50mm(EDM)
Tilt Sensor	
Type	Biaxial compensator
Working Range	±3'
Accuracy	1"
Communication	
Internal Data Memory	Approx. 80,000 Points
Interface	Standard RS232, USB
Wireless communication	Bluetooth
USB Port	32GB, USB, mini-B
Data Format	ASCII, CSV, DXF, GTS, GSI
Power Supply	
Battery Type	Rechargeable high-energy lithium battery
Voltage/Capacity	7.4V DC / 3000 mAH
Operating Time ⁴	Optimally 18 hours
Operation	
Display	Dual face, 256 colour display, 2.8-inch, 240*320 pixel colorful screen
Keyboard	2 sides alpha-numerical back-light. keyboard with 28 keys
System	Real-time operating system
Trigger Key	Yes
Plummet	
Type	Laser point, 4 brightness levels adjustment/ Optical plummet (optional)
Accuracy	1mm at 1.5m instrument height
Environmental	
Operating Temperature	-20°C-50°C
Storage Temperature	-40°C-70°C
Temperature and air pressure input	Automatic sensing
IP Rating (IEC60529 Standard)	IP65

Reminding:

*1. Good Conditions: good visibility about 20km, overcast, no scintillation.

*2. Under Kodak Gray (90%). Measuring distance may vary depending on targets and the conditions.

*3. Measuring time may vary depending on measure distance and conditions. For the initial measurement, it may take a longer time.

*4. Battery life specification at 25°C. It might be shorter in low temperature or if the battery is old.



Headquarters:

Geosolution i Göteborg AB
Stora Ävägen 21, 436 34
ASKIM, Sweden
info@satlabgeo.com

Regional Offices:

Budapest, Hungary
Ankara, Turkey
Dubai, UAE
New Delhi, India
Scottsdale, USA
Tokyo, Japan
Hong Kong, China

www.satlabgeo.com

